
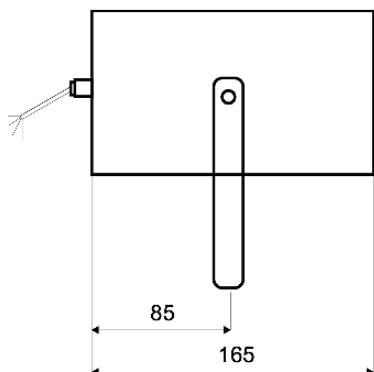


LA-130WT-DC

Projector-Speaker for Outdoor Use
in ALU with 2x 6 Watt Power and AB-Dual-Cone-Technique

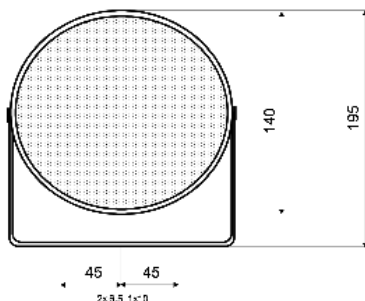

TECHNICAL DATA

LA-130WT-DC

Loudspeaker:	120 mm - broadband
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	80 - 15 000 Hz
SPL 1W/1M:	104 dB (3,5 kHz)
SPL 6W/1M:	112 dB (3,5 kHz)
Radiation:	180° (1 kHz)
Dimension:	140 (ø) x 165 mm
Weight:	1,4 kg
Material:	ALU
Color:	RAL 9010 (powdered)

- Two autonomous loudspeaker/100V-transformer per system
- Enable operation of speaker via two discrete cable-lines
- In case of breakdown of one line, continuous function of the second
- Weather-proof through Stainless Steel & ALU components & Rain-protection
- No bisection of the membrane surface
- Custom colors optional
- Ceramic clamp & thermal fuse by request