



# LA-130WT

Projector-Speaker for Outdoor Use  
in ALU with 6 Watt Power

**ELKO  
SCHMID**




Elektroakustische Komponenten

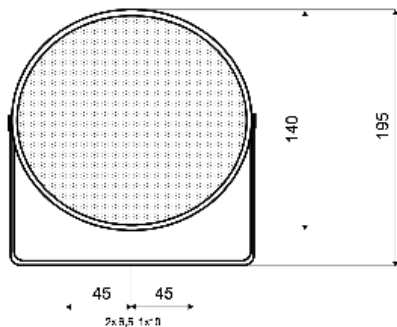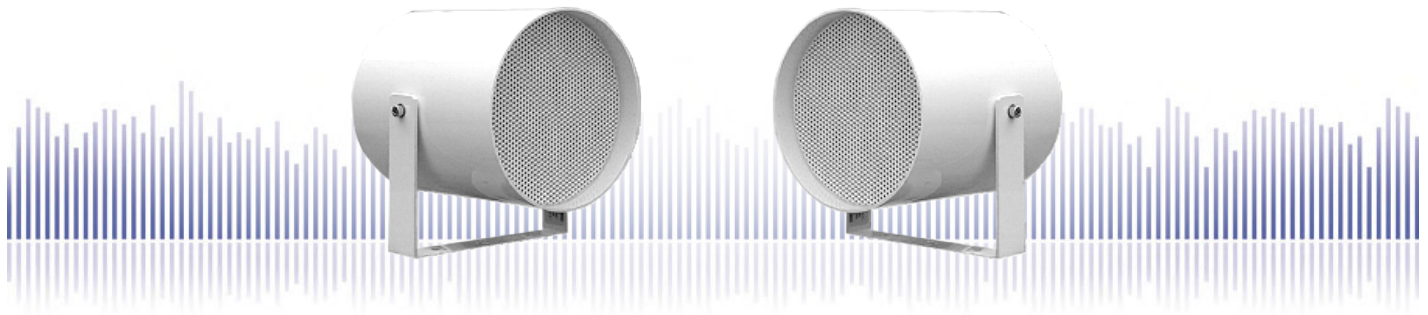

## TECHNICAL DATA

## LA-130WT

|                    |                          |
|--------------------|--------------------------|
| Loudspeaker:       | 120 mm - broadband       |
| Power-Consumption: | 100V-6-3-1,5W            |
| Frequency-Range:   | 80-15 000 Hz             |
| SPL 1W/1M:         | 94 dB                    |
| SPL 6W/1M:         | 102 dB                   |
| SPL 1W/1M max.:    | 104 dB (3,5kHz)          |
| SPL 6W/1M max.:    | 112 dB (3,5kHz)          |
| Radiation:         | 180° (1,4kHz)            |
| Dimension:         | 140 (ø) x 165 mm         |
| Weight:            | 1,3 kg                   |
| Material:          | ALU                      |
| Color:             | RAL 9010 (powder coated) |

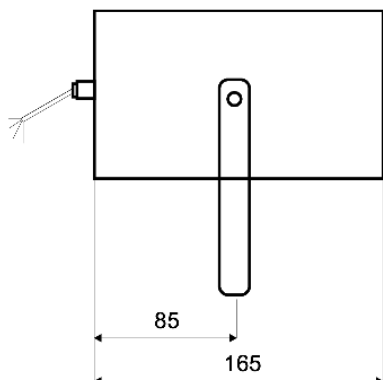

- Weather-proof
- Humidity impregnated
- Additional rain-protection through custom-rain-roof
- High Quality Sound for Music & Speech
- Cable length 0,8m, extensions available
- Custom colors and pendulum version optional
- 10W and 2-Way versions obtainable
- Three 100V-tappings via cable
- Ceramic clamp & thermal fuse by request